



TWO HANDLE DECK MOUNT POT FILLER FAUCET

ACCESSORIES CHECKING

LIST OF THE STANDARD ACCESSORIES:

Please check the accessory list and notify our company or our distributor of any discrepancy.

Remarks:

1. Without affecting their performance, accessories may be changed without further notice.
2. Drawings are for reference only. For product size and shape refer to actual faucet.

Note: Nozzle sizes vary according to model



Item	The Accessory List	Qty
1	EA-2DF-12 Base Faucet Asm	1
2	Extension Base Connector	1
3	Base Connector Screw	1
4	Extension Tube Assembly	1
5	Flexible Connector Hose	2




INSTALLATION INSTRUCTION

INSTALLATION FOR TWO HANDLE DECK MOUNT POT FILLER FAUCET WITH EXTENSION TUBE:

1. Install extension base connector to the bottom of the faucet body and secure with screw.
2. Feed flexible supply lines one at a time up through the threaded mounting tube end of the extension tube assembly.
3. Install 2 flexible supply hoses into the ports in the bottom of faucet body.
4. Screw the extension tube assembly onto the extension base connector.
5. Feed supply hoses through deck opening.
6. Secure faucet in place with washers and flange nut.
7. Flush supply lines of debris before connecting flexible supply hoses.
8. Check for leaks

Item	The Accessory List	Qty
1	Base Faucet Assembly	1
2	Mounting Hardware Kit, EA-2DF	1
3	Flexible Connector Hose	2

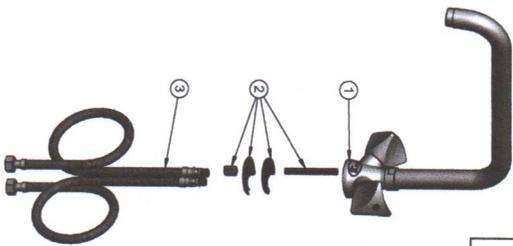

INSTALLATION FOR TWO HANDLE DECK MOUNT POT FILLER FAUCET:

1. Install threaded rod mounting post into bottom of faucet body.
2. Install 2 flexible supply hoses into the ports in the bottom of faucet body.
3. Feed supply hoses through deck opening.
4. Secure faucet in place with "C" washers and hex nut.
5. Flush supply lines of debris before connecting flexible supply hoses.
6. Check for leaks.

CLEANING & MAINTENANCE

To keep the product clean and shining, follow as below:

1. Flush with clean water and dry with soft cloth only;
2. If any dirt, clean with soft liquid or transparent glass detergent;
3. Do not use any scrubbing detergent, polisher or scraper;
4. Do not use acid detergent, indissolvable grain-like detergent or soap.



Limited One Year Warranty
T&S warrants to the original purchaser (other than for purposes of resale) that such product is free from defects in material and workmanship for a period of one (1) year from the date of purchase. During this one-year warranty period, if the product is found to be defective, T&S shall, at its option, repair and/or replace it. To obtain warranty service, products must be returned to...

T&S Brass and Bronze Works, Inc.
Attn: Warranty Repair Department
P.O. Box 1088, 2 Saddleback Cove
Traverse Reef, SC 29690

Shipping, freight, insurance, and other transportation charges of the product to T&S and the return of repaired or replaced product to the purchaser are the responsibility of the purchaser. Repair and/or replacement shall be made within a reasonable time after receipt by T&S of the returned product. This warranty does not cover items which have received secondary finishing or have been altered or modified after purchase, or for defects

caused by physical abuse to or misuse of the product, or shipment of the product.
Any express warranty not provided herein, and any remedy for Breach of Contract which might arise, is hereby excluded and disclaimed. Any implied warranties of merchantability or fitness for a particular purpose are limited to one year in duration. Under no circumstances shall T&S be liable for loss of use or any special consequential costs, expenses or damages.
Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Specific rights under this warranty and other rights vary from state to state.

P/N: 098-018386-45 Rev:0
Date: 03-09-12
Drawn: TH
Checked: DMH 03-16-12
Approved: JHB 03-24-12